


## POSITIONING UNIT

Vibrator + stepped bowl (in stainless steel)

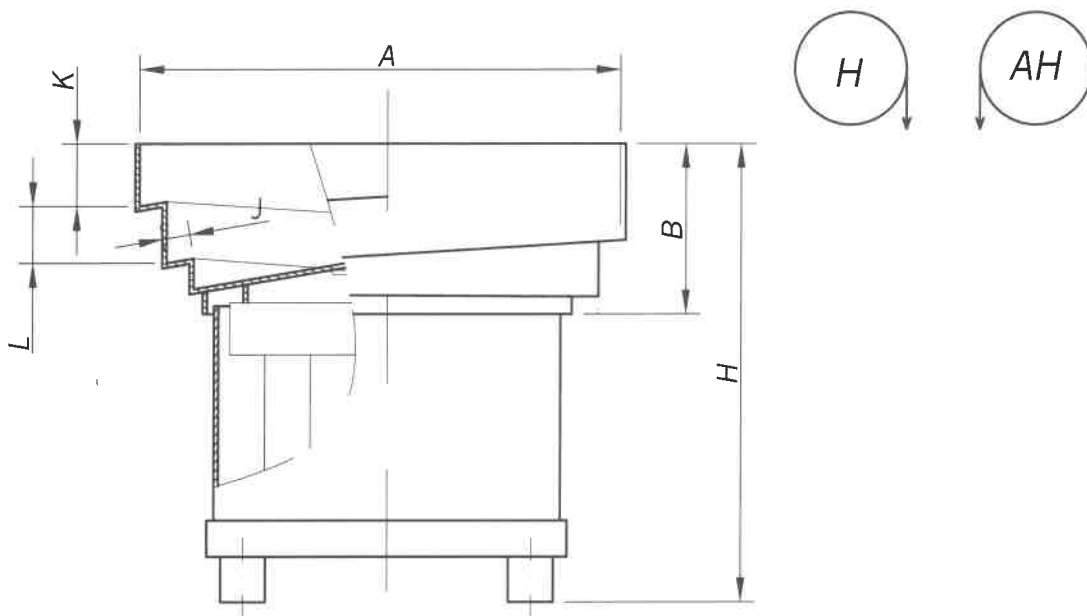


Unit model	Dimensions (mm)						Weight ~kg		Bowl code	Vibrator model		
	A (ss)*	B	H(~)		J	K	L	I		II	I	II
			I	II								
VA-220/1E	220	75	205	---	12	21	25		---	15600-07	VA-15	---
VA-360/2E	360	115	288	328	22	28	40			25600-07	VA-25	VA-26
VA-510/3E	510	160	386	401	32	37	60			35600-07	VA-35	VA-36
VA-640/4E	640	205	460	480	38	44	80			45600-07	VA-45	VA-46
VA-725/6E	725	285	---	555	25	51	100	---	---	61600-07	---	VA-61
VA-900/6E	900	295	---	565	60	49	110	---	---	61600-17	---	VA-61
VA-925/7E	925	350	---	659	35	60	125	---	---	76600-07	---	VA-76
VA-1150/7E	1150	360	---	669	80	61	135	---	---	76600-17	---	VA-76
VA-1050/8E	1050	425	---	850	40	71	150	---	---	86600-07	---	VA-86
VA-1350/8E	1350	435	---	860	100	74	160	---	---	86600-17	---	VA-86

### NOTES

1. All models available in clockwise (H) and anticlockwise (AH) versions.
2. For further information on the most suitable vibrator model and type of bowl, we recommend completing a quote request form (C-01.1 -complete version- or C-01.2 -simplified version-) or contacting our Technical-Sales Department directly.
3. The dimensions shown correspond to Positioning Units without separator (with standard bowl). Please inquire should the resulting dimensions be required (with separate bowl).

\*(ss) Sum of half-shafts.



Técnicas de Alimentación Dinámica, S.L.



Crom, 11-13 - E-08907 L'HOSPITALET DE LLOBREGAT (Barcelona)  
 Tel. +34 93 263 14 20\* (8 líneas) - Fax +34 93 263 31 30  
 E-mail: cial@tadvibracion.com - export@tadvibracion.com

E-01.20

01/03/02